



COMMERCIAL-GRADE

RESIDENTIAL ELECTRIC WATER HEATERS

HYBRID ELECTRIC HEAT PUMP AL WITH ANTI-LEAK TECHNOLOGY

The Heat Pump AL smart hybrid electric water heater from American is the most cost-effective, energy-efficient option available for consumers who want to save money on their utility bills. Heat Pump AL combines annual savings of more than \$600 per year* on utility bills with new leak protection features to support homeowner peace of mind like leak detection and optional automatic water shutoff.

HOW DO THEY WORK?

Absorb ambient heat from the surrounding air to heat water using a compressor

- Self-contained heat pump unit is integrated into the top of the tank
- Backup electric elements can supplement the heat pump depending on operating mode, environmental conditions and hot water demand

QUALIFIES FOR MANY STATE AND LOCAL UTILITY REBATES - CHECK WWW.AMERICANWATERHEATER.COM

EXCEPTIONAL ENERGY EFFICIENCY

- Improved efficiency up to 3.88 Uniform Energy Factor (UEF) can reduce the cost of water heating by up to 75%*
- Heat pump can work down to 37°F ambient for more days of high efficiency operation
- ENERGY STAR® certified for many state and local utility rebates

iCOMM® SMART CONNECTIVITY

- Monitor and control your water heater through the free iCOMM app
- Connect through a local Wi-Fi network or directly to the water heater through Bluetooth
- If applicable download the Time of Use schedule of your local electric utility to prioritize heating when the rates are most affordable
- Receive alerts and notifications

LEAK PROTECTION TECHNOLOGY

- Our Coregard™ Anode Rod have a stainless steel core that extend the life of the anode rod allowing superior tank protection far longer than standard anode rods
- Smart sensor alerts user in the event a leak does occur for added peace of mind
- Compatible with the automatic water shutoff valve for enhanced protection (accessory kit 100345338)
- Notifications through the iCOMM app

QUIET OPERATION

- Whisper-quiet operation at 45 dBA

FLEXIBLE DESIGN

- Top and front water connections for easy installation
- Zero clearance required on sides and back to fit in tighter spaces
- Integrated ducting adapters for installations in confined spaces
- Ideal for basements, utility rooms or garage installations; the compressor transfers heat to the water while dehumidifying and cooling the ambient air

ELECTRONIC CONTROLS

- User-friendly electronic interface allows easy control of temperature, operating mode and diagnostics

ADVANCED QUALIFICATIONS

- NEEA Tier 4
- California Title 24 JA13 Qualified
- CTA-2045 (AC)
- OpenADR 2.0b VEN
- HUD Compliant

10-YEAR LIMITED WARRANTY

- For complete information, consult written warranty or go to americanwaterheater.com



*Comparing 80-gallon Heat Pump AL against pre-2015 similarly-sized standard electric using DOE EF to UEF conversion rates and \$0.14 per kWh electricity cost. Savings may vary.



COMMERCIAL-GRADE

RESIDENTIAL ELECTRIC WATER HEATERS

| Model Number | Nominal Capacity | Rated Storage Volume | UEF | First Hour Rating (Gallons) | Dimensions in Inches | | | | | | | Approx. Shipping Weight (lbs) | Warranty Term |
|----------------|------------------|----------------------|------|-----------------------------|----------------------|------|-------|------|---|-------|------|-------------------------------|---------------|
| | | | | | A | B | C | D | E | F | G | | |
| HPS10250H045DV | 50 | 46 | 3.80 | 65 | 63 | 22 | 40.5 | 3.75 | 8 | 43.5 | 48 | 196 | 10 |
| HPS10266H045DV | 66 | 67 | 3.70 | 82 | 61.5 | 26.5 | 38.25 | 4 | 8 | 41.25 | 46 | 284 | 10 |
| HPS10280H045DV | 80 | 82 | 3.88 | 95 | 69 | 26.5 | 46.5 | 4 | 8 | 50.5 | 54.5 | 302 | 10 |

Requires 30 amp breaker.

Top T&P option not available on these models.


MULTIPLE OPERATING MODES

Choose from multiple modes to match water heating needs and environmental conditions

- Hybrid (Default): Hot water delivery balanced with energy saving performance
- Heat Pump: Maximum energy efficiency
- Electric: Uses only the electric heating elements
- Vacation: Reduce energy use while you are away

iCOMM SMART CONNECTIVITY

- Download the free iCOMM app to get started.



Download on the
App Store

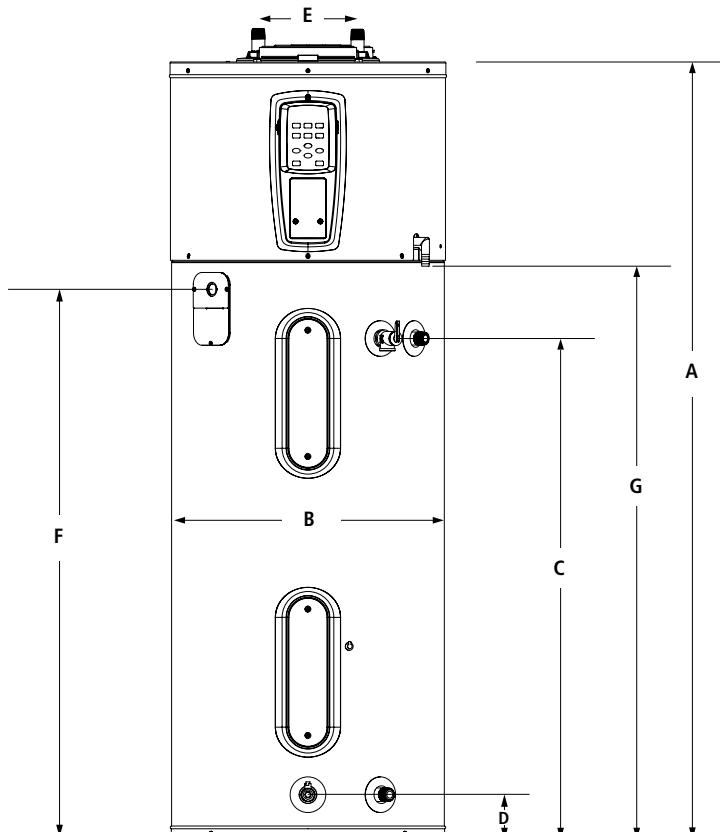
GET IT ON
Google Play

OTHER FEATURES:

- Easily accessible front mounted junction box
- Environmentally-friendly non-CFC foam insulation
- Durable, enhanced-flow brass drain valve
- CSA certified and ASME rated temperature & pressure relief valve

OPERATING REQUIREMENTS:

- Requires provision for non-acidic condensate draining; if a suitable drain is not available a condensate pump is required
- 208/240 VAC 50/60Hz single phase 30 amp power supply



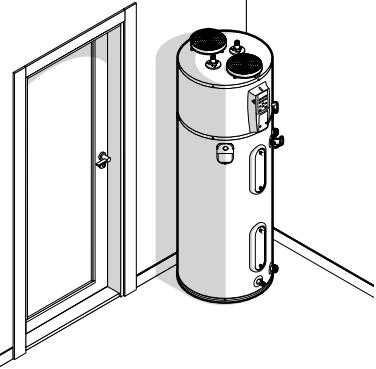
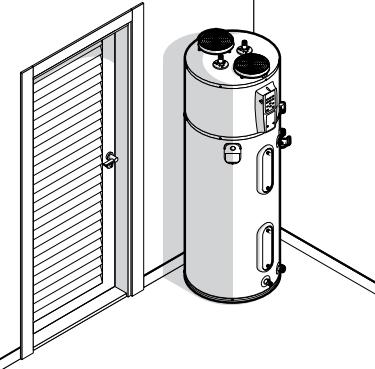
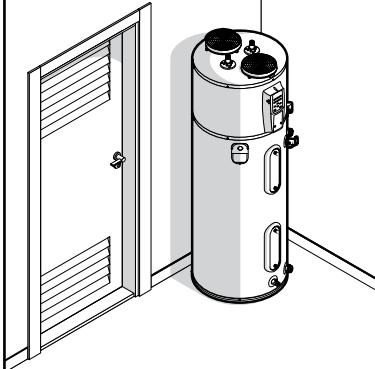
Apple logo and Apple App Store Logo are trademarks of Apple Inc.
Google Play and the Google Play logo are trademarks of Google LLC.

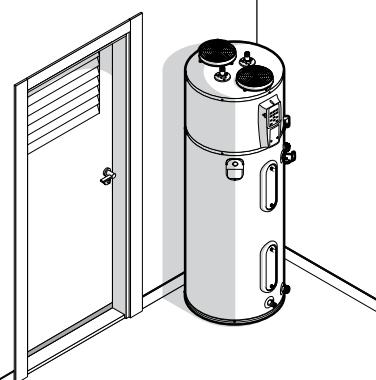
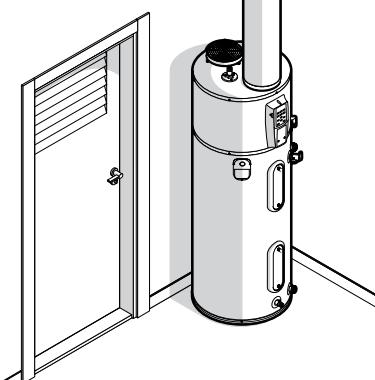
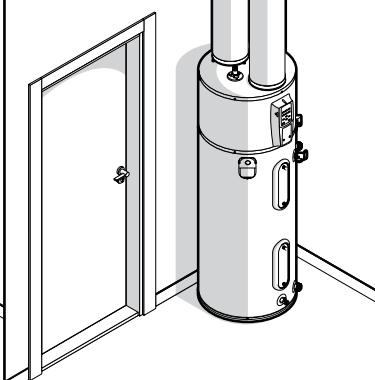


COMMERCIAL-GRADE

RESIDENTIAL ELECTRIC WATER HEATERS

450 FT³ ENCLOSED ROOM SIZE IS 35% SMALLER THAN OTHER MANUFACTURERS REQUIRE

| | | | |
|---------------------------------------|---|--|---|
| |  |  |  |
| Configuration | Enclosed Room | Fully Louvered Door | Upper and Lower Louvers in Door ^{1,2} |
| Minimum Space (FT³) | 450 | 84 | 84 |
| Space Example L x W x H (FT) | 6 x 7.5 x 10 | 3 x 2.8 x 10 | 3 x 2.8 x 10 |

| | | | |
|---------------------------------------|--|---|--|
| |  |  |  |
| Configuration | Upper Louver and Undercut Door ^{1,3,4} | Inlet OR Outlet Ducting and a Single Louver OR Undercut Door ^{1,3,4,5} | Inlet AND Outlet Ducting ⁶ |
| Minimum Space (FT³) | 84 | No minimum space requirement | No minimum space requirement |
| Space Example L x W x H (FT) | 6 x 7.5 x 10 | | |

¹Minimum louver size is 130 in² free area each.

²When two louvers are installed, install one louver at the top of the heater and the other close to the floor.

³Undercut door should have a minimum of 0.75" clearance. (minimum 18 in² air gap)

⁴When one louver is installed, install the louver in a location close to the top of the heater.

⁵This heater supports multiple duct diameters as well as rigid and flex ducting options. See manual for more information.

For technical information call (800) 999-9515. American Water Heaters reserves the right to make product changes or improvements without prior notice.

For complete warranty information consult the written warranty of American Water Heaters found at:

www.americanwaterheater.com or call (800) 999-9515 | Copyright © by American Water Heater Company September 2025. All Rights reserved.